

ASF RAZAR TAPE®

BARB TAPE PRODUCTS

CBT 65 760SC

Design

CBT65 760mm diameter is made up of continuous circular coil loops alternately clipped adjacently around the circumference creating a concertina format.

Performance and Durability

BCBT65 is manufactured with high quality Grade 304 stainless steel with a long barb format formed around a high tensile galvanised wire. The clips used adjacently around the circumference of the barb tape are high quality stainless steel.

Applications

- Correctional and Detention Centres
- Water Treatment Plants
- Shipping Ports
- Airports and more

Unique Features

- CBT65 barb is used in a high security range offering excellent intruder-proof penetration with an extremely aggressive, sharp profile.
- The stainless steel barb material offers greater life expectancy compared to Galvabond materials.

Finishes

Standard surface finish for the Razar Tape® material is 2B Grade 304 stainless steel within a matt to satin appearance.

Quality & Testing

CBT65 is manufactured using high quality stainless steel blade material, ensuring quality surface finish.



Appropriate Standards


The CBT 65 stainless steel is ASTM-A240 and the same for the clip. The Range 1 wire is supplied as to AS1472-2003.

Recommended Fixings

Recommended fastening of the CBT 65 is via ASF Razar Wire clip with M8 cuphead bolt, washer and hexagon nut. ASF recommend that every third fastening point, a shear nut is used in place of a hexagon nut.

Specifications

The long size blade is manufactured from 0.60mm thick coil stainless steel with a blade length of 65mm at 100mm spacings creating high security benefits. The core wire selected is a high quality 2.5mm diameter W05 galvanised Range 1 spring wire.

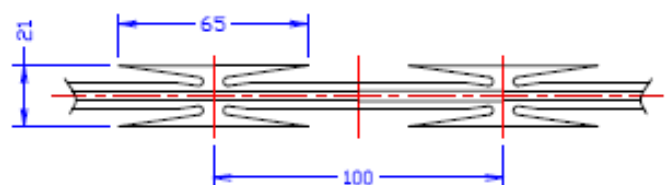

The specifications and descriptions of products and services contained in this data sheet were correct at the time of publishing. ASF reserves the right to change specifications or withdraw products without notice.



Australian Security Fencing Pty Ltd
Protecting your interests