

ASF RAZAR TAPE®

BARB TAPE PRODUCTS

BTO 22 600SC

Design

BTO22 600mm diameter is made up of continuous circular coil loops alternately clipped adjacently around the circumference creating a concertina format.

Performance and Durability

BTO22 is manufactured with high quality Grade 304 stainless steel with a medium barb format formed around a high tensile galvanised wire. The clips used adjacently around the circumference of the barb tape are high quality stainless steel.

Applications

- Correctional and Detention Centres
- Water Treatment Plants
- Roads and Bridges
- Power Stations and Sub Stations
- Industrial Application
- Private Industries
- Shipping Ports
- Gas Lines
- Railways
- Airports and more

Unique Features

- BTO22 barb is used in a medium security range offering excellent intruder-proof penetration with a slightly more aggressive, sharper profile.
- The stainless steel barb material offers greater life expectancy compared to Galvabond materials.

Finishes

Standard surface finish for the Razar Tape® material is 2B Grade 304 stainless steel within a matt to satin appearance.

Quality & Testing

BTO22 is manufactured using high quality stainless steel blade material, ensuring quality surface finish.



Appropriate Standards


The BTO22 stainless steel is ASTM-A240 and the same for the clip. The Range 1 wire is supplied as to AS1472-2003.

Recommended Fixings

Recommended fastening of the BTO22 is via ASF Razar Wire clip with M8 cuphead bolt, washer and hexagon nut. ASF recommend that every third fastening point, a shear nut is used in place of a hexagon nut.

Specifications

The medium size blade is manufactured from 0.55mm thick coil stainless steel with a blade length of 22mm over the points, formed at 34mm pitches by x 15mm wide, creating medium security benefits. The core wire selected is a high quality 2.5mm diameter W05 galvanised Range 1 spring wire.

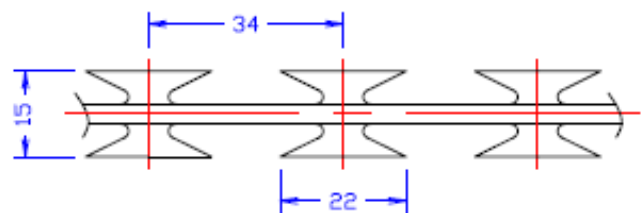

The specifications and descriptions of products and services contained in this data sheet were correct at the time of publishing. ASF reserves the right to change specifications or withdraw products without notice.



Australian Security Fencing Pty Ltd
Protecting your interests