

ASF SECUREMAX®
HIGH SECURITY MESH

CROCTOP®

Design

CrocTop® Spiked Fence Toppings have been designed as a low cost option for deterring would be intruders from climbing over a fence or barrier.

The metal toppings can be easily fixed to the top of most security fence systems.

CrocTop® is machine punched to form a 25mm high triangular spike.

CrocTop® is available in 2.4M lengths of flat strip or angle to suit most applications.

Barbed tape toppings can also be added onto CrocTop®. Barbed tapes can be fixed at variable spacing's as required.

CrocTop® Fence Toppings maintain security to the edge of mesh fencing panels when used as part of the Securemax® fencing system as they prevent the mesh sheets from being removed.

Securemax® mesh panels can be raked to suit site conditions using the CrocTop® Spiked Fence Topping.

Performance and Durability

All CrocTop® Spiked Fence Toppings are manufactured from High Grade 350 steel and hot dip galvanised to ensure maximum performance and longevity.

Applications

CrocTop® Spiked Fence Toppings can be retrofitted to brick walls, colourbond fencing, chain wire fences and can be used as part of the Securemax® 358 fence system.


- Roads and Bridges
- Power and Water
- Industrial Application
- Private Industries
- Shipping Ports
- Gas Lines
- Railway Infrastructure

Finishes

CrocTop® is available in pre galvanised and hot dipped galvanised finishes although powder coating and wet paint finishes are available upon request

Appropriate Standards

CrocTop® Spiked Fence Toppings hot dip galvanising process is AS/NZS 4680-2006 ensuring a quality long-term non-corrosive surface finish.

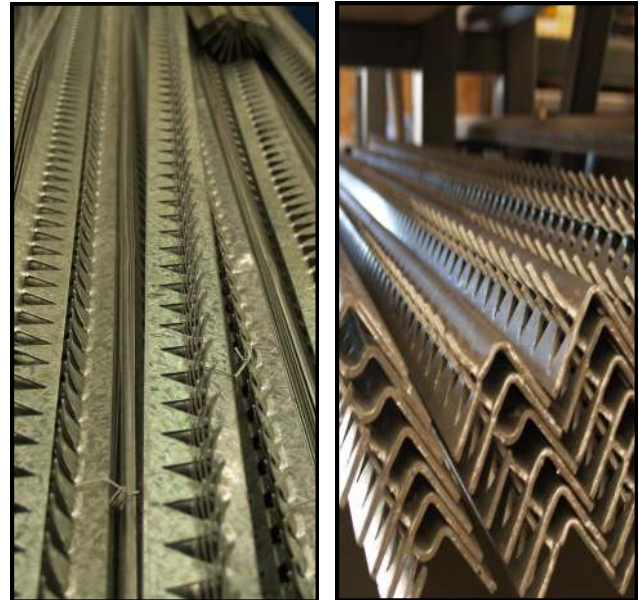

Recommended Fixings

Recommended fastening of CrocTop® Spiked Fence Toppings to 358 mesh and Securemax® 'H' sections via M8 cup head bolt,

Securemax washer with hexagon nut and / or shear nut.

Other fastening methods are via a security self-drilling fastener to hollow sections.

Specifications

Std Croc Top manufactured from 350 grade
50x50x4mm hot dipped galvanized equal angle
Flat Croc Top manufactured from 1.5x1200x1200
Z275 galvansied sheet
Product length 2415mm
80 spikes per length
30mm centre to centre of spikes

The specifications and descriptions of products and services contained in this data sheet were correct at the time of publishing. ASF reserves the right to change specifications or withdraw products without notice.



Australian Security Fencing Pty Ltd
Protecting your interests